




COMBINATION CURB & GUTTER TYPE B-6.12

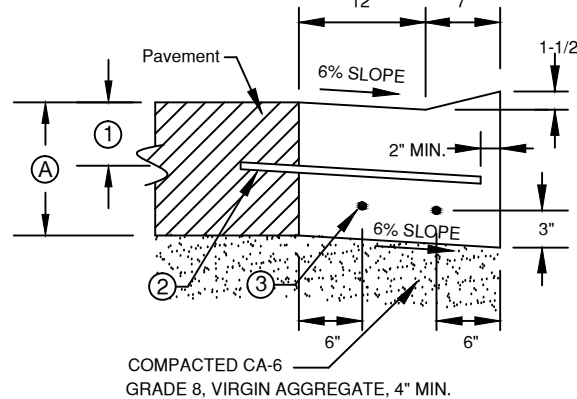


COMBINATION DEPRESSED CURB & GUTTER

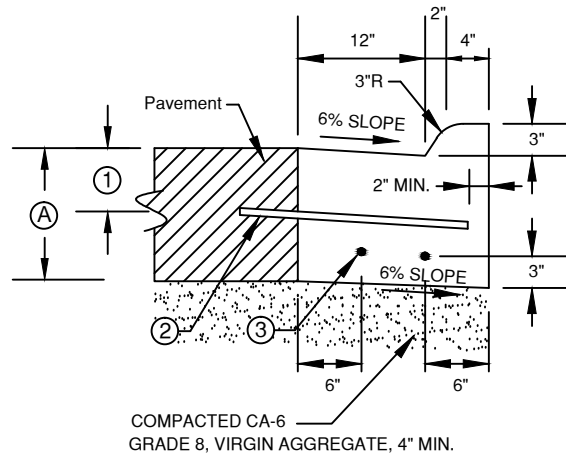

COMBINATION CURB & GUTTER TYPE M-3.12

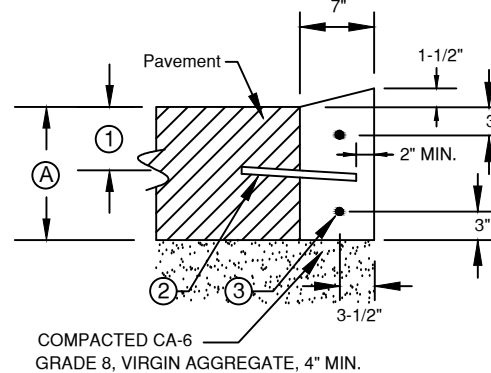

DEPRESSED CURB (TYPE B)

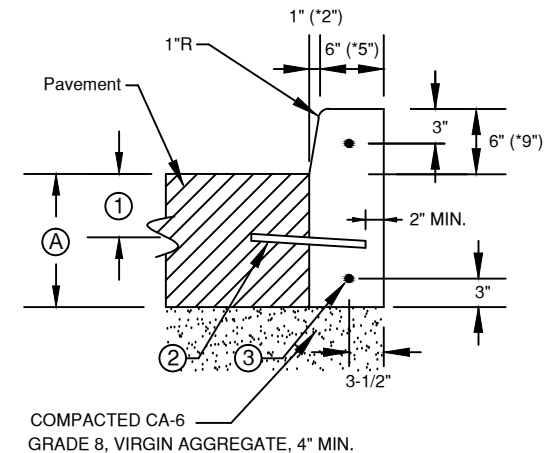

BARRIER CURB (TYPE B)

Ⓐ PAVEMENT DEPTH OR 9" MIN.

① TO BE CENTERED OR SET AS REQUIRED IN FIELD.

② 1/2" DIA. STEEL TIE BAR AT 2'-6" CENTERED WHEN PAVEMENT IS CONCRETE. OMIT WHEN ADJACENT PAVEMENT IS FLEXIBLE.

③ 5/8" DIA. STEEL REBAR CONTINUOUS (TYPICAL).

NOTES:

PROVIDE DEPRESSED CURBS AT DRIVEWAYS, CROSSWALKS, AND SIDEWALKS, ETC.

ALL CONCRETE SHALL HAVE 4,000 P.S.I. COMPRESSIVE STRENGTH AT 28 DAYS.

ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO I.D.O.T. STANDARD 606001-01 UNLESS OTHERWISE NOTED HEREIN.

* FOR 9" CURB, THESE SHALL BE 2" & 5".